

MFS35 JET



MFS35 JET specifications

Number of Cylinders	3
Output	Jet Pump 35 hp (26.1 kw)
Displacement	866 cc (52.9 cu.in)
Bore x Stroke	70 x 75 mm (2.76 x 2.96 in)
Starting	Electric
Control Type	Remote Control or Tiller Handle
Gear Shift	Forward - Neutral - Reverse
Gear Ratio	1:1
Transom Height	20"
Weight	234 lbs (106 kg)
Alternator Output	12V, 252W, 21A
Max RPM Range	5,000 - 6,000

Standard features include: MicroComputer Programmed Ignition System, Electronic Fuel Injection, Start in Gear Protection, Thermostat Controlled Cooling System, Through-Jet Exhaust, Overheat Buzzer, Power Trim and Tilt, Oil Pressure Warning, Variable Idle Speed




TOHATSU
Feel the Wind™



Feel the
Wind™

Based on the top performing MFS50 platform, the MFS35 JET is designed to open up a new world of hunting and fishing spots. With a jet-drive, you can explore waters that are difficult to reach with a propeller-driven outboard.

Dimensions

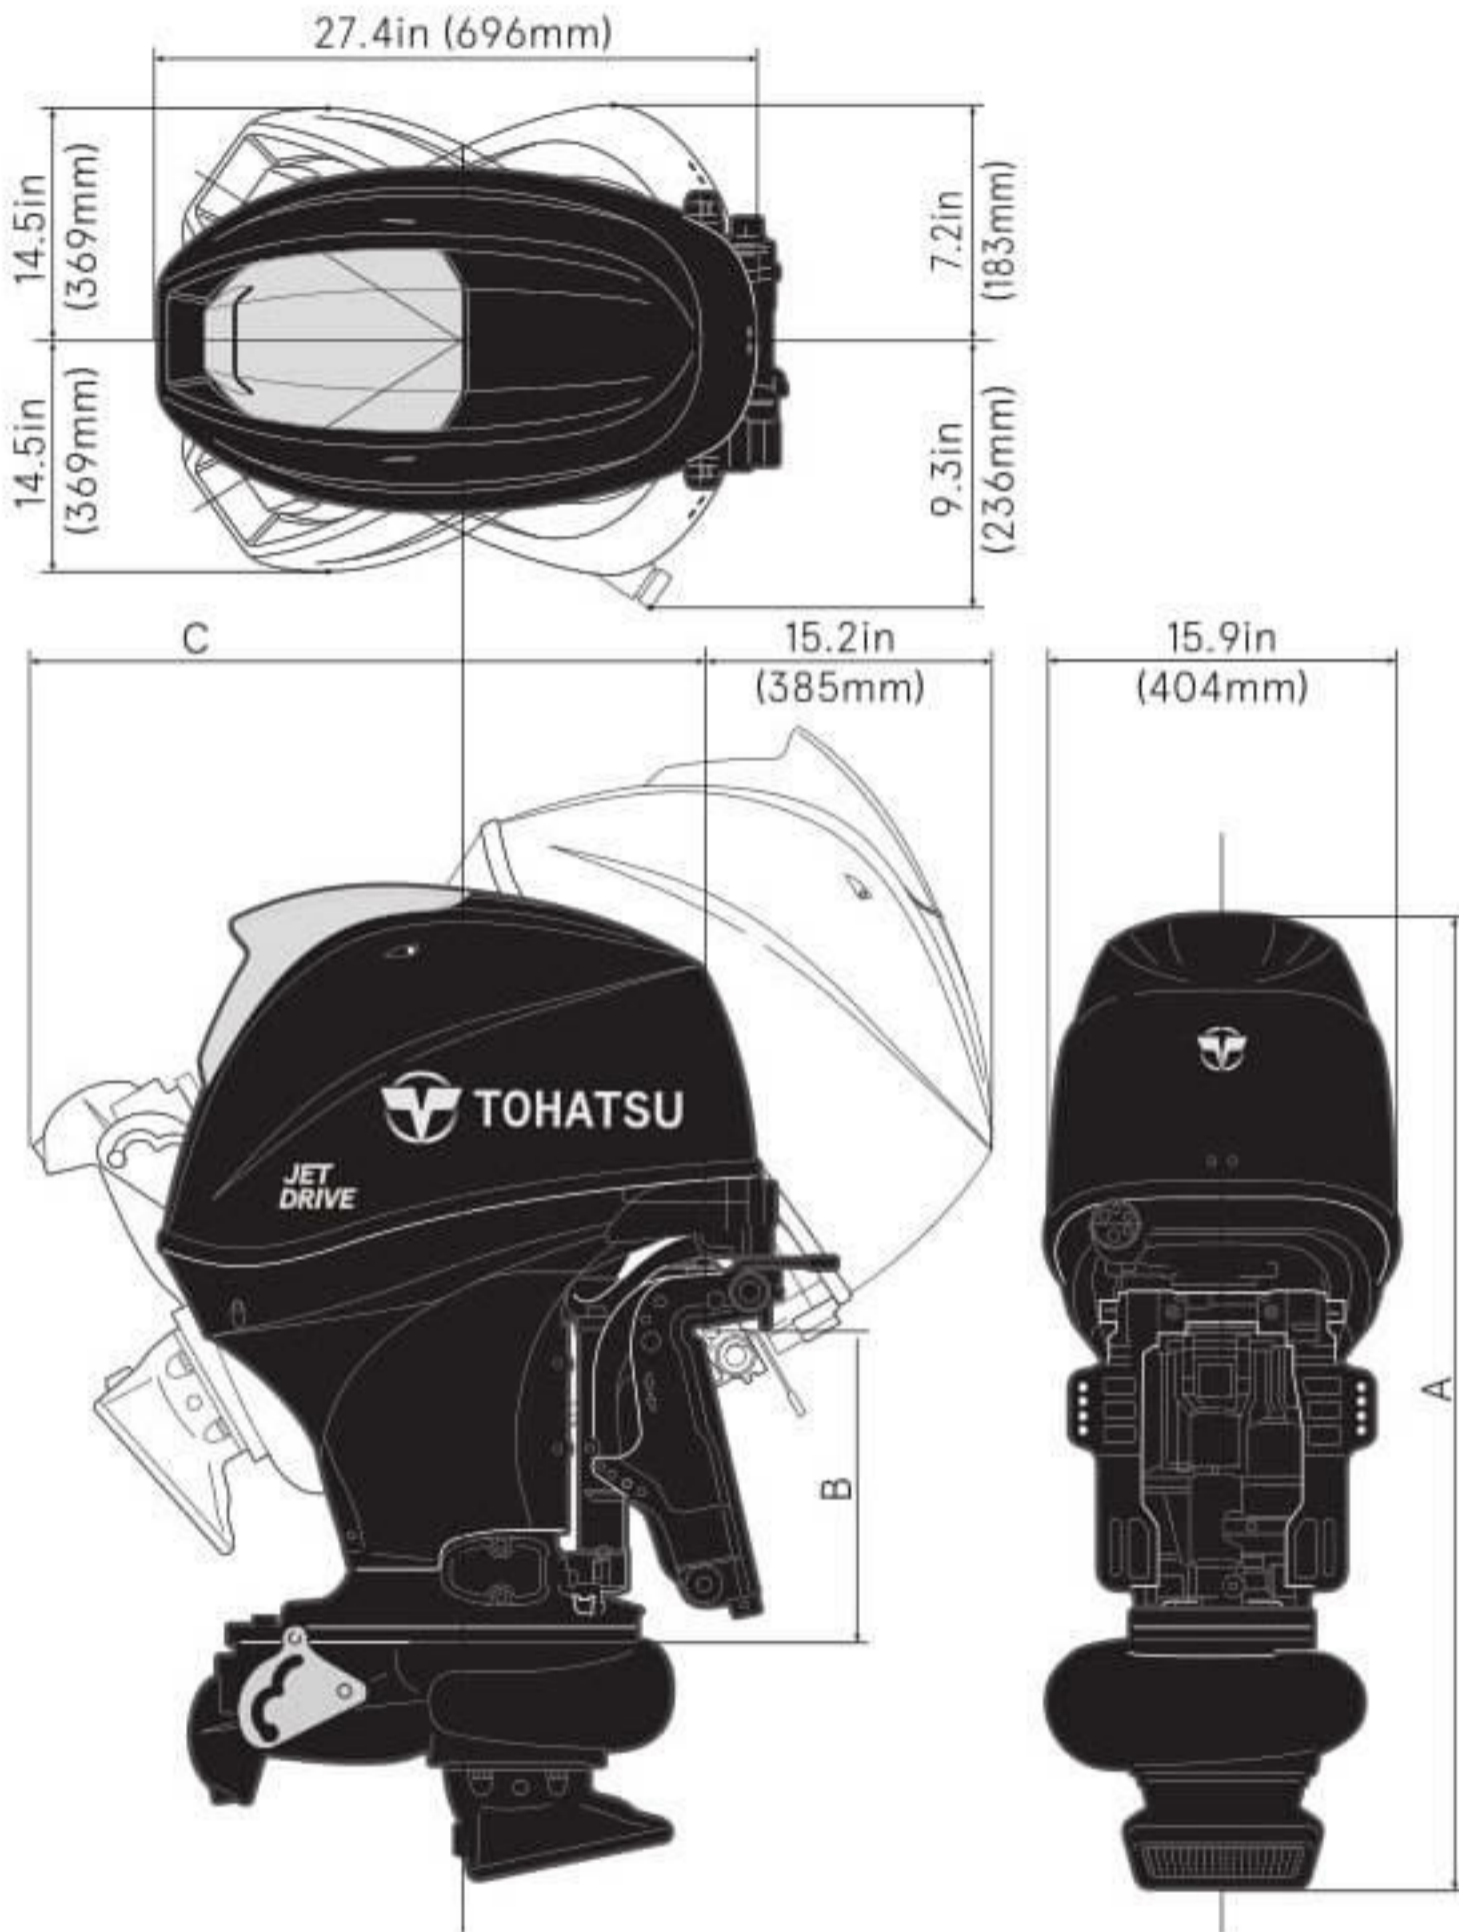

Dry Weight (lbs/kg)

Model	ET
Transom S:	228.2 (103.5)

Dimensions (in/mm)

Model	A	B	C
Transom S:	51.2 (1300)	21.9 (555)	29.7 (755)