

MFS40 JET

MFS40 JET specifications			
Number of Cylinders	3		
Output	Jet Pump 40 hp (29.4 kw)		
Displacement	866 cc (52.9 cu.in)		
Bore x Stroke	70 x 75 mm (2.76 x 2.96 in)		
Starting	Electric		
Control Type	Remote Control or Tiller Handle		
Gear Shift	Forward - Neutral - Reverse		
Gear Ratio	1:1		
Transom Height	20"		
Weight	237 lbs (107.5 kg)		
Alternator Output	12V, 252W, 21A		
Max RPM Range	5,000 - 6,000		


Standard features include: MicroComputer Programmed Ignition System, Electronic Fuel Injection, Start in Gear Protection, Thermostat Controlled Cooling System, Through-Jet Exhaust, Overheat Buzzer, Power Trim and Tilt, Oil Pressure Warning, Variable Idle Speed

Based on the top performing MFS60 platform, the MFS40 JET is designed to open up a new world of hunting and fishing spots. With a jet-drive, you can explore waters that are difficult to reach with a propeller-driven outboard.



MFS40A JET

Dimensions

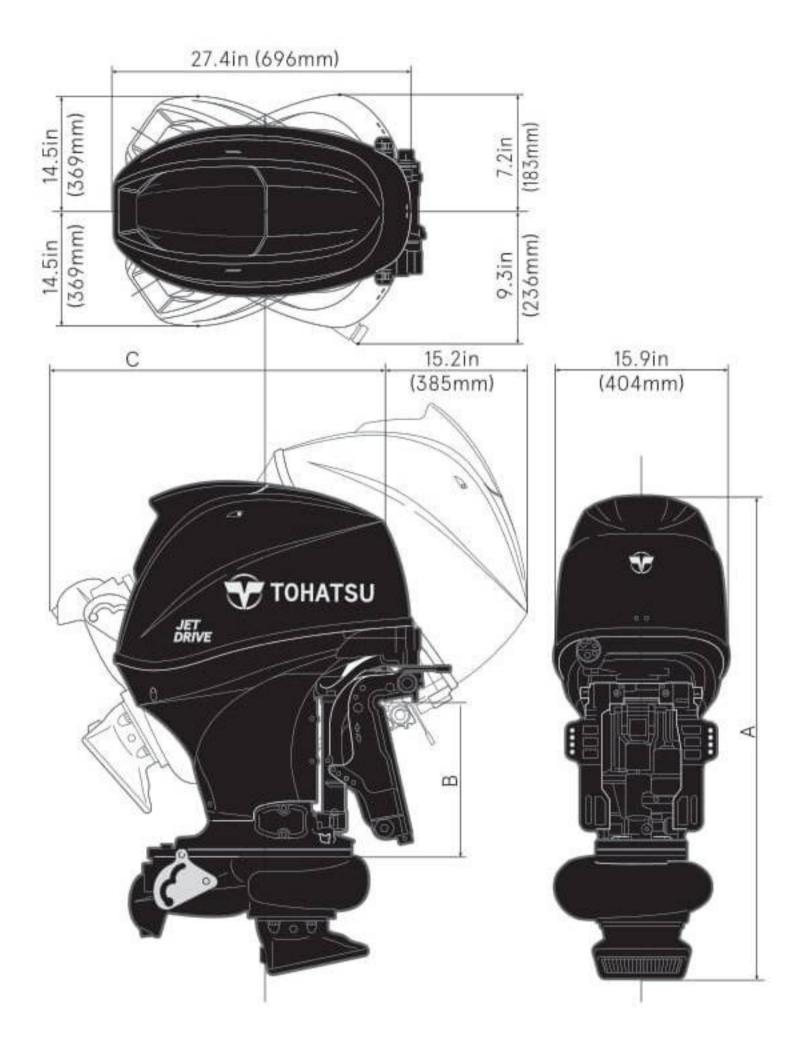

Dry Weight	(lbs/kg)	(lbs/kg)	
Model	ET		
Transom L:	231 (105.0)		
Dimensions			(in/mm)
Model	Α	В	С
Transom L:	51.2 (1300)	21.9 (555)	29.7 (755)